




## China 6202 Bearing Supplier

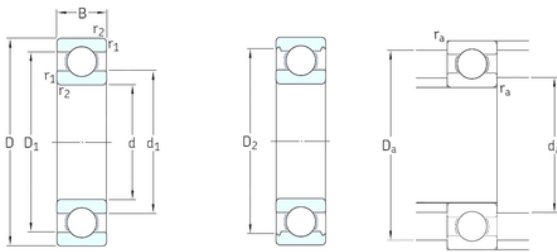

High quality SKF bearings 6000 6001 6002 6004  
6006 6007 6008 6009 C3 SKF Deep Groove Ball  
bearing

Bearing No. 6000

6000 Bearing 2D drawings and 3D CAD models

Size	10x26x8 mm
Bore Diameter	10 mm
Outer Diameter	26 mm
Width	8 mm
d	10 mm
D	26 mm
B	8 mm
C	8 mm
d1	14,8 mm
r1 min.	0,3 mm
r2 min.	0,3 mm
D1	21,2 mm
D2	22,6 mm
da min.	12 mm
Da max.	24 mm
rc max.	0,3 mm
Weight	0,019 Kg
Basic dynamic load rating (C)	4,75 kN
Basic static load rating (C0)	1,96 kN
Fatigue load limit (Pu)	0,083
Reference speed	67000 r/min
Limiting speed	40000 r/min
Calculation factor (f0)	12
Category	Single Row Ball Bearings



## China 6202 Bearing Supplier

Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.02
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	10MM Bore; 26MM Outside Diameter; 8MM Outer Race Diameter; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	6000
Weight / LBS	0.05
Outside Diameter	1.024 Inch   26 Millimeter
Bore	0.394 Inch   10 Millimeter
Outer Race Width	0.315 Inch   8 Millimeter
d <sub>1</sub>	14.8 mm



## China 6202 Bearing Supplier

$D_2$	22.6 mm
$r_{1,2}$ min.	0.3 mm
$d_a$ min.	12 mm
$D_a$ max.	24 mm
$r_a$ max.	0.3 mm
Basic dynamic load rating C	4.75 kN
Basic static load rating $C_0$	1.96 kN
Fatigue load limit $P_u$	0.083 kN
Calculation factor $k_r$	0.025
Calculation factor $f_0$	12
Mass bearing	0.018 kg